


custom_list_widget.hpp

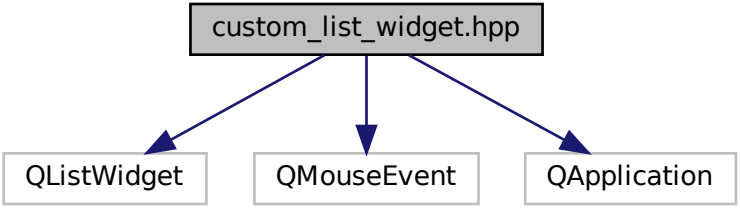

```
graph TD; A[custom_list_widget.hpp] --> B[QListWidget]; A --> C[QMouseEvent]; A --> D[QApplication];
```

The diagram illustrates the dependencies of the `custom_list_widget.hpp` header file. It is represented as a central box at the top with three arrows pointing downwards to three separate boxes below it. The boxes are labeled `QListWidget`, `QMouseEvent`, and `QApplication` from left to right.

QListWidget

QMouseEvent

QApplication